



How to make an announcement

1. Tap **ANNOUNCE**.




2. Available announcement targets are displayed:

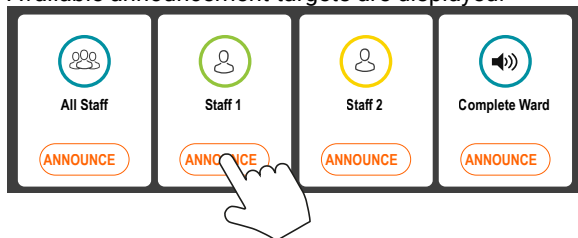


3. Tap **ANNOUNCE** of the desired target.
4. The speech connection is established.
5. Make the announcement.
6. Tap **END** to finish the announcement.

How to call


1. Tap **CALL**.



2. Available call targets are displayed.

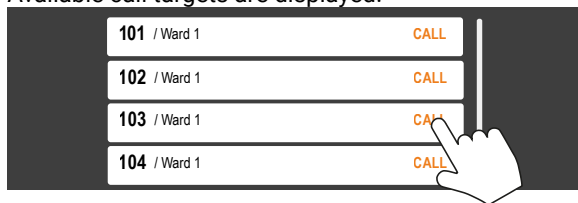


3. Tap **CALL** of the desired target.
4. The speech connection is established.

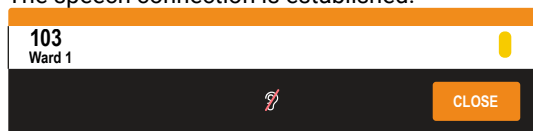


5. Talk to the person on the other end.
NOTE! If the privacy function at the other end is on, ask the person to press a call button to turn the privacy off.
6. Tap **CLOSE** to close the speech connection.

How to activate/deactivate ward coupling



1. Tap **SETTINGS**.



2. Tap **Ward coupling** in the left column.

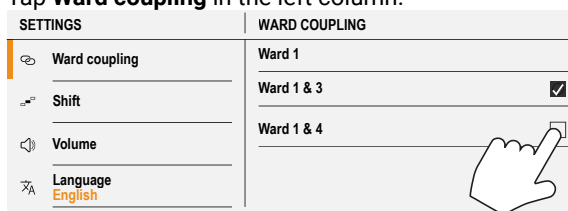


3. Tap the desired ward coupling.
4. Tap **HOME** to end the procedure.




How to activate a shift



1. Tap **SETTINGS**.



2. Tap **Shift** in the left column.

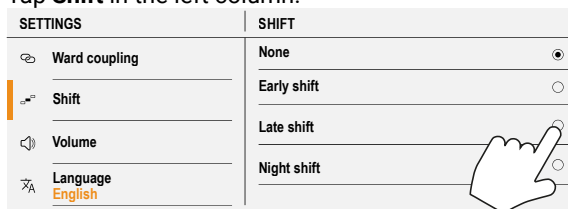

3. Tap the desired shift.
4. Tap **HOME** to end the procedure.




Tunstall




Quick reference guide

ComStation IP

Article no. 76060650

 Please also read the detailed user guide. To do so, tap on the question mark in the header or download the PDF via the QR code.




 **Fault in the nurse call system!** Immediately inform a technician, if this icon appears in the home screen header.



Home screen

- To start the ComStation IP, tap **LOGIN** in the login screen.


The home screen appears and shows the calls and staff presence of your ward:

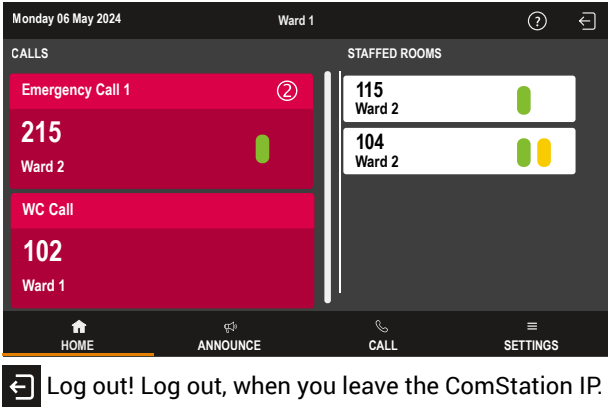

How calls are displayed

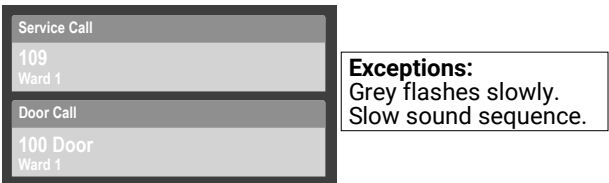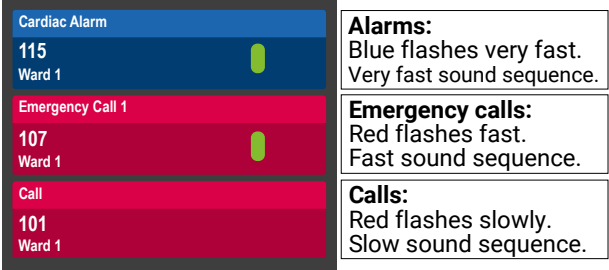

Several calls in one room




How to answer a call

1. Tap on the call.




A speech connection to the call location is established.

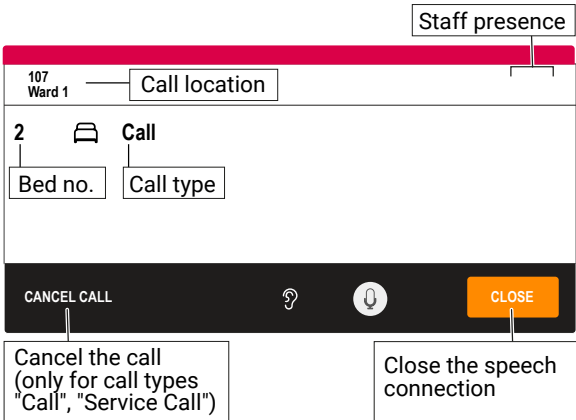

2. Speak to the caller and ask what help is needed.
3. Tap **CLOSE** to close the speech connection. The speech connection is closed. The call is displayed as an answered call.
4. Organise the required help.
5. Call handling is complete when the call has been cancelled at the call location or from the ComStation IP using the **CANCEL CALL** button.

How answered calls are displayed

As long as an answered call is not cancelled, it is displayed as an answered call.

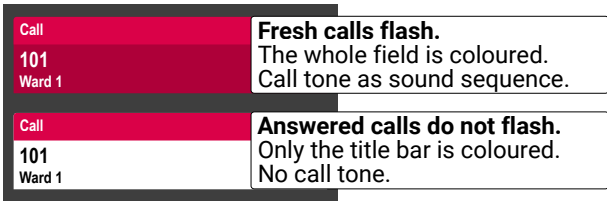


How to speak to staff

- Tap the entry in the list of staff presences.



A speech connection to the staff is established.

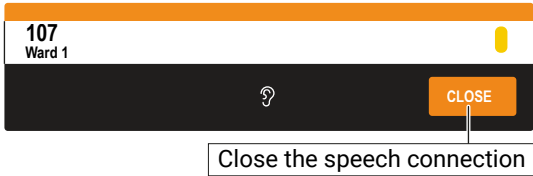

Status of speech connection

